

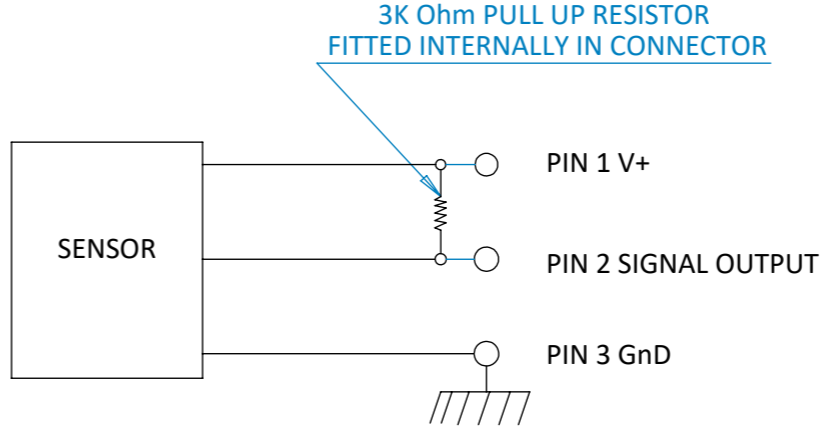


INTERNAL WIRE COLOUR	
SPEED SENSOR	CONNECTOR
BROWN	BLACK
BLACK	WHITE
BLUE	GREEN

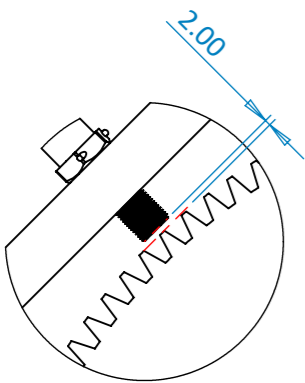

HEX SHOULDER DETERMINES DEPTH STOP AND AIR GAP
 SENSOR IS NON SENSITIVE TO ORIENTATION

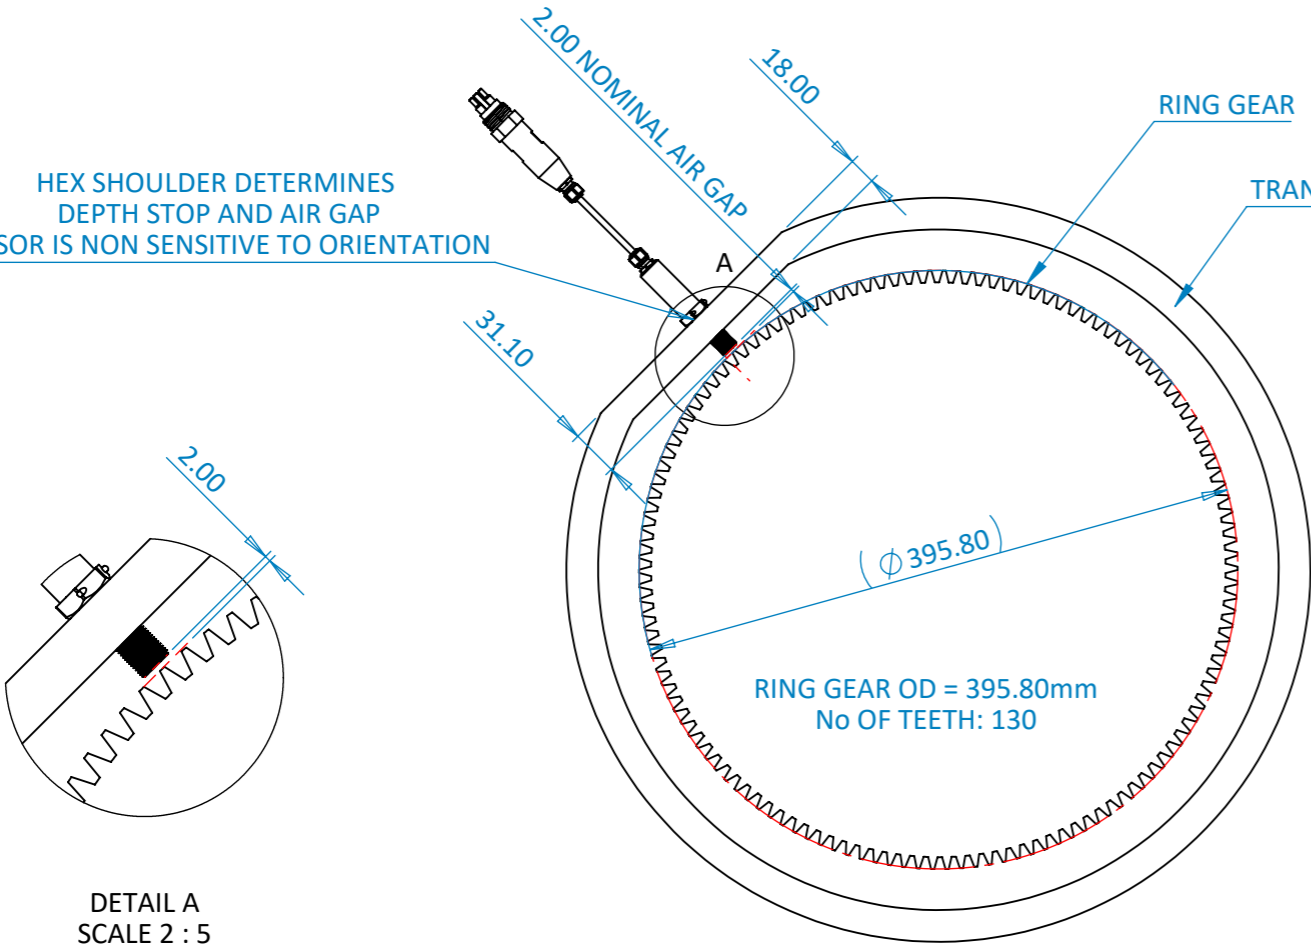

DETAIL A
 SCALE 2 : 5

- NOTES:
1. OPERATING TEMPERATURE : -40degC to +125degC
 2. VOLTAGE SUPPLY: 24VDC
 3. CURRENT CONSUMPTION: <10mA
 4. OUTPUT RISE TIME: 5uS
 5. OUTPUT FALL TIME: 5uS
 6. OUTPUT TYPE: SINK
 7. 3K Ohm PULL UP RESISTOR REQUIRED ACROSS V+ & OUTPUT WHEN USED WITH 24VDC SUPPLY.
 8. SENSOR MATERIAL: STAINLESS STEEL 316L
 9. PRESSURE RATING OF ENTIRE ASSEMBLY: 5BAR

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ±0.05 ANGULAR: ±0.05		FINISH: M/C	DEBUR AND BREAK SHARP EDGES	REVISION ISSUE 01	DESCRIPTION FIRST RELEASE	DATE 10.6.20	APPROVED NJM
DRAWN NJM	SIGNATURE	DATE 10.6.20	<p>THIRD ANGLE</p>	TITLE: SPEED SENSOR			
CHK'D				DWG NO. IF-010-01	A3		
APP'V'D				SCALE: 2:1	SHEET 1 OF 1		
MFG				MATERIAL: 316L STAINLESS STEEL	WEIGHT:		
Q.A			© DESIGN COPYRIGHT RESERVED Reventec Ltd Unit 14, Devonian Business Centre Salisbury Wiltshire SP5 3JH TEL: +44(0)1753 530321 Email: info@reventec.com Website: www.reventec.com				